



# SPO12 WIDE

**AUTOMOTIVE  
SYMMETRIC 2-POST LIFT**  
12,000 LBS. CAPACITY



MODEL SHOWN: SPO12N7W6BL  
Lift shown with optional accessories

## INCLUDES FRONT AND REAR 3-STAGE ARMS FOR ADDED REACH

**Minimum Arm Reach: 27 1/2"**  
**Maximum Arm Reach: 59"**

### Standard with adjustable TA truck adapters

For use on framed vehicles.

Includes two sets (four each) of 3 1/2" and 5 1/4" adapter extensions plus




### ALSO AVAILABLE

**Optional RA round adapters** for lifting unibody and battery electric vehicles.

**Part# FJ6225**

**NOTE:** RA adapters derates 12,000 lbs. capacity lifts to a lifting capacity of 11,000 lbs.

**NOT TO BE USED FOR LIFTING FRAMED VEHICLES.**

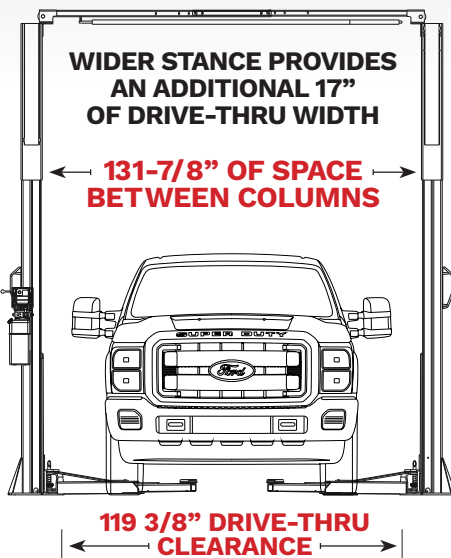

**The wider stance  
makes it easier to  
service wide  
trucks and battery  
electric vehicles.**



**SCAN CODE TO  
LEARN MORE!**

## EXTENDED HEIGHT MODEL AVAILABLE

Add an additional 12" of overall height for taller vehicles

- 12,000 lbs. capacity
- Rise height of over 75"
- Original "Double S" column
- ALI Gold Certified

### SPECIFICATIONS **SPO12 WIDE** 2 POST LIFT MODELS BL = Blue / RD = Red

### **STANDARD HEIGHT** SPO12N7W6BL/RD **EXTENDED HEIGHT** SPO12N7W7BL/RD

Rise*	75 3/4" - 78 1/8"
Overall Height	13' 11 1/2"
Standard Height	14' 11 1/2"
Extended Height	
Overall Width	12' 10 5/8"
Drive-thru	119 3/8"
Inside Columns	131 7/8"
Front Arm Min/Max	27 1/2" / 59"
Rear Arm Min/Max	27 1/2" / 59"
Min Adapter Height	4 3/4"
Min Bay Size	14' x 26'
Min Ceiling Height	14' 1/2"
Standard Height	15' 1/2"
Extended Height	
Motor / Voltage 1Ø	2 HP, 208-230V
Time of Full Rise	60 seconds

\* Rise measures lowest and highest position of the supplied adapters from floor to full cylinder stroke.



PART OF **VSG** a **DOVER** company

2700 Lanier Drive  
Madison, IN 47250, U.S.A.



800.445.5438 / rotarylift.com / Sales: insidesales@vsgdover.com

Support: technicalsupport@rotarylift.com / Government Sales: governmentorders@vsgdover.com

Lit# **SPO12 WIDE Cutsheet.2023.08**

©2023 VEHICLE SERVICE GROUP®  
All Rights Reserved. Unless otherwise indicated, ROTARY, VEHICLE SERVICE GROUP®, DOVER and all other trademarks are property of Dover Corporation and its affiliates. Printed in U.S.A.

Product specifications, part numbers, images and component descriptions are subject to change without notice or liability.